

e.VITRUM®

DIGITAL SIGNAGE
OUTDOOR + INDOOR



EDITION 5.0

Information and advertising - digital and interactive

ST-VITRINEN TRAUTMANN



EV 21



EV 22

EV 21
Public Display 55" - Portrait
EV 22
Public Displays 55" - Portrait as storefront application
EV 23
Monitor-Stele 75" - Portrait with cut out design elements and LED bar with waterfall effect.



EV 23



EV 31



EV 32

EV 31
Interactively available real estate offers via 55" monitor with touch function
EV 32
Multitouch wayfinding system in a shopping mall
EV 33
46" monitor with touch function
TIM - Graz



EV 33

e.VITRUM® OUTDOOR+INDOOR

The monitor solutions of the range e.VITRUM® are available in the sizes 46" to 75" for indoor as well as outdoor use. You can choose between portrait and landscape format, wall mounting or freestanding steles. After several years of research and testing our systems meet the highest demands. We guarantee a trouble-free and low-maintenance operation and simultaneously very quiet external noise and slim, elegant housing forms at sub-zero temperatures and direct sunlight.



EV 25



EV 34

e.VITRUM® INTERACTIVE

With our newly developed product line e.Vitrum®-INTERACTIVE we open up a new dimension in the DooH market. Passersby are not passive viewers anymore, but control themselves what is displayed. Even a combination with gaming software is possible and combines the advertising message with an emotional sense of achievement.

Information that previously had only been displayed passively becomes operable. Subway maps can be zoomed, real estate offers displayed and product listings scrolled. While still outside the customer can learn about what to expect inside.



EV 26

EV 25
Digital showcase 55" in landscape-format
EV 26
Screen-mile 46" Landscape inclined to the viewer at 15° and integrated into a niche



EV 35

EV 34
75" monitor with interactive software, controlled by motion capture and a multi-touch user interface
EV 35
Passenger information system with an interactive touchscreen solution



CONTENT

| | |
|----------------------|----|
| PRODUCT OVERVIEW | 6 |
| OUTDOOR | 8 |
| INDOOR | 19 |
| SOFTWARE + PLAYER-PC | 22 |
| GALLERY | 25 |

Dear customers,

In this catalog, we present our digital product range in its 5th edition. These monitors and displays from ST-DIGITAL target customers with exciting pictures and information that can be updated in a matter of seconds. Extra sturdy devices are especially designed for use in the outdoor or semi-outdoor area. They have no problems with difficult light or temperature conditions and are ideally suited for display windows, shopping centers, and pedestrian areas.

Our displays can be used for a wide range of applications. Impress your customers with professionally placed information, pictures and films. Use these displays to guide visitors or to provide currently relevant data. Additionally, you can design foyers or use video walls to effectively present your company in the outdoor area of your company headquarters. We offer the right display solution for absolutely every application and building environment.

In today's world, information needs to be available at a moment's notice. With digital products, we improve and replace traditional forms of customer engagement such as posters and notices. The digital elements of the e.VITRUM series bring the information directly to the point of sale. They also impress with a brilliant display quality while creating a modern, attractive ambience.

Your ST-Digital-Team

ST-Vitrinen goes ST-Digital

As ST-VITRINEN Trautmann GmbH & Co KG, we have been offering a comprehensive portfolio of showcases, advertising clocks and displays systems since 1969. We have developed into one of the leading suppliers in this market segment and we are proud that our products have been used in cities, museums, railway stations, airports, and many other places around the world for decades. Following the trend of times, we realized early on that typical out-of-home advertising is getting removed and that more and more dynamic,

animated and rapidly updatable advertising content will be required. The technical progress of monitors has enabled us to develop technically superior advertising systems on a digital basis and to bring them onto the market.

Since the required technical know-how, production and quality are considerably greater for digital systems, we have established our own business division under which all development, production and sales processes are coordinated.

In our external presentation, this business division is being communicated under the brand name ST-DIGITAL as a self-sustaining brand in order to separate the digital, electronic product segment from the classic, analog portfolio.

With ST-DIGITAL products, you will get a solution that meet the highest standards in technology and design. Everything is developed and manufactured at our location in Bielefeld and guaranteed "made-in-Germany"



STELE OUTDOOR Page 8



FREESTANDING OUTDOOR Page 12



WALL OUTDOOR Page 14




DIGITAL-SHOWCASE OUTDOOR Page 16



STELE INDOOR Page 18



STELE INDOOR Page 19

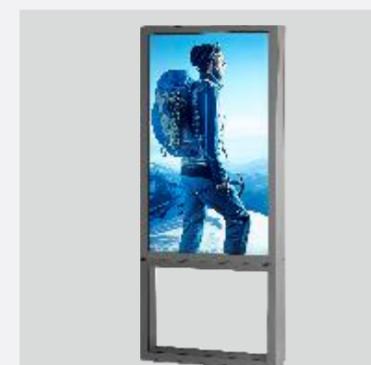

STOREFRONT-STELE INDOOR Page 20



STOREFRONT-DISPLAY INDOOR Page 21



SOFTWARE + PLAYER-PC Page 22



Freestanding ST-monitor-stele in portrait format for outdoor applications

Digital information can be displayed professionally at any location.

A special LCD-display is being used which is protected by an anti-glare glass front with a UV+IR-blocking filter. This ensures excellent readability even in direct sunlight. Optionally the system can be delivered with a multi-touch-enabled glass surface.

A ventilation and heating system – which was developed in-house – allows safe operation in environments with extreme weather conditions, e.g. ski resorts with high temperature fluctuations or railway platforms and production facilities with exposure to dust and heat.

The stele is manufactured with extruded aluminium hollow section profiles and available in almost any RAL-colour as well as any colour achievable through anodization of aluminium.

| MODEL | 46 P 111 | 55 P 111 | 65 P 111 | 75 P 111 | 85 P 111 |
|-----------------------------|----------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|
| panel | 46 inch LCD | 55 inch LCD | 65 inch LCD | 75 inch LCD | 85 inch LCD |
| resolution | 1080 × 1920 pixel | 1080 × 1920 pixel | 1080 × 1920 pixel | 1080 × 1920 pixel | 2160 × 3840 pixel |
| visible size of monitor W×H | 573 × 1018 mm | 681 × 1210 mm | 808 × 1433 mm | 930 × 1652 mm | 1057 × 1876 mm |
| brightness | 2500 nit | 2500 3500 5500 7000 nit | 4000 nit | 2500 nit | 2500 nit |
| temperature range | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C |
| temperature control | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system |
| glass with UV+IR protection | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - Optiwhite |
| dimensions W×H×D | 753 × 2050 × 205 mm | 861 × 2245 × 205 mm | 988 × 2323 × 220 mm | 1130 × 2552 × 220 mm | 1257 × 2846 × 298 mm |

All models are also available in a double-sided variation (Depth D = 298 mm)

QUALITY FACTS



REFERENCE-PROJECT



VARIATION



Freestanding ST-monitor-stele in landscape format for outdoor applications

Wherever information needs to be displayed individually adjustable and focused on a particular target group, monitor displays are the optimal medium of communication.

Individual sales messages as well as text or picture information can be transmitted flexibly and rendered visible immediately.

The landscape format is especially suited to convey customer information via video clips. Touch screen functionality is optionally available.



QUALITY FACTS



Welding certified!



Tightness certified!



RoHS Conformity



Impact resist. certified!



CE Conformity

| MODEL | 46 L 111 | 55 L 111 | 65 L 111 | 75 L 111 | 85 L 111 |
|-----------------------------|----------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|
| panel | 46 inch LCD | 55 inch LCD | 65 inch LCD | 75 inch LCD | 85 inch LCD |
| resolution | 1920 × 1080 pixel | 1920 × 1080 pixel | 1920 × 1080 pixel | 1920 × 1080 pixel | 3840 × 2160 pixel |
| visible size of monitor W×H | 1018 × 573 mm | 1210 × 681 mm | 1433 × 808 mm | 1652 × 930 mm | 1876 × 1057 mm |
| brightness | 2500 nit | 2500 3500 5500 7000 nit | 4000 nit | 2500 nit | 2500 nit |
| temperature range | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C |
| temperature control | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system |
| glass with UV+IR protection | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - Optiwhite |
| dimensions W×H×D | 1198 × 1926 × 205 mm | 1390 × 1980 × 205 mm | 1613 × 2044 × 220 mm | 1852 × 2115 × 220 mm | 2076 × 2178 × 298 mm |

All models are also available in a double-sided variation (Depth D = 298 mm)

VARIATION



Freestanding ST-monitor-stele in portrait format for outdoor applications

As a variant of the outdoor totems, we offer our monitor solutions as freestanding displays with legs. This way you have an additional design possibility to integrate your digital content into the environment.

The entire electronics and ventilation technology is integrated into the monitor housing without any restriction of functionality or operational safety.

QUALITY FACTS



Welding certified!



Tightness certified!



RoHS Conformity



Impact resist. certified!



CE Conformity



| MODEL | 46 P 121 | 55 P 121 | 65 P 121 | 75 P 121 | 85 P 121 |
|--|----------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|
| panel | 46 inch LCD | 55 inch LCD | 65 inch LCD | 75 inch LCD | 85 inch LCD |
| resolution | 1080 × 1920 pixel | 1080 × 1920 pixel | 1080 × 1920 pixel | 1080 × 1920 pixel | 2160 × 3840 pixel |
| visible size of monitor W×H | 573 × 1018 mm | 681 × 1210 mm | 808 × 1433 mm | 930 × 1652 mm | 1057 × 1876mm |
| brightness | 2500 nit | 2500 3500 5500 7000 nit | 4000 nit | 2500 nit | 2500 nit |
| temperature range | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C |
| temperature control | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system |
| glass with UV+IR protection | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - Optiwhite |
| dimensions W×H _{display} /H _{total} ×W | 753×1250/2050×220mm | 861×1445/2245×220mm | 988×1668/2323×220mm | 1130×1897/2552×220mm | 1257×2121/2846×298mm |

Freestanding ST-monitor-stele in portrait format for outdoor applications

For use with the widespread TV landscape format in the outdoor segment, we offer the freestanding models with legs in the popular landscape format as well.

No matter which model you choose, you will always receive a product of the highest quality possible for outdoor use.



| MODEL | 46 L 121 | 55 L 121 | 65 L 121 | 75 L 121 | 85 L 121 |
|--|----------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|
| panel | 46 inch LCD | 55 inch LCD | 65 inch LCD | 75 inch LCD | 85 inch LCD |
| resolution | 1920 × 1080 pixel | 1920 × 1080 pixel | 1920 × 1080 pixel | 1920 × 1080 pixel | 3840 × 2160 pixel |
| visible size of monitor W×H | 1018 × 573 mm | 1210 × 681 mm | 1433 × 808 mm | 1652 × 930 mm | 1876 × 1057 mm |
| brightness | 2500 nit | 2500 3500 5500 7000 nit | 4000 nit | 2500 nit | 2500 nit |
| temperature range | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C |
| temperature control | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system |
| glass with UV+IR protection | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - Optiwhite |
| dimensions W×H _{display} /H _{total} ×W | 1198×808/1926×220mm | 1390×916/1980×220mm | 1613×1043/2044×220mm | 1852×1175/2115×220mm | 2076×1302/2178×298mm |

ST-monitor in portrait format for outdoor applications

Through audiovisual stimuli, digital signage opens up many new possibilities to draw customers' attention to products, bargains and promotions.

With e.Vitrum solutions for outdoor applications your visitors or customers are informed about your current offerings – even before entering your building.

The customers' level of attention can be increased through optional audio support. This is enabled by integrated, (almost) invisible surface sound speakers. The volume is automatically attuned to the ambient noise level.



QUALITY FACTS

- Welding certified!
- Tightness certified!
- RoHS Conformity
- Impact resist. certified!
- CE Conformity

| MODEL | 46 P 131 | 55 P 131 | 65 P 131 | 75 P 131 | 85 P 131 |
|--|----------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|
| panel | 46 inch LCD | 55 inch LCD | 65 inch LCD | 75 inch LCD | 85 inch LCD |
| resolution | 1080 × 1920 pixel | 1080 × 1920 pixel | 1920 × 1080 pixel | 1920 × 1080 pixel | 2160 × 3840 pixel |
| visible size of monitor W×H | 573 × 1018 mm | 681 × 1210 mm | 808 × 1433 mm | 930 × 1652 mm | 1057 × 1876 mm |
| brightness | 2500 nit | 2500 3500 5500 7000 nit | 4000 nit | 2500 nit | 2500 nit |
| temperature range | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C |
| temperature control | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system |
| glass with UV+IR protection | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - Optiwhite |
| dimensions W×H _{display} /H _{total} ×W | 753 × 1250 × 195 mm | 861 × 1445 × 195 mm | 988 × 1668 × 195 mm | 1130 × 1897 × 195 mm | 1257 × 2121 × 275 mm |

ST-monitor in landscape format for outdoor applications

ST-monitors are available for on-the-wall installations as well as recess integration. Depending on special requirements of a particular installation spot, it is possible

to tilt the system towards the spectator. This increases the readability of the displayed information, especially when the monitor is placed above eye level.

The landscape format is especially suitable for presenting customer information via video clips and film segments. Optionally the system can be equipped with a multi-touch surface.



| MODEL | 46 L 131 | 55 L 131 | 65 L 131 | 75 L 131 | 85 L 131 |
|--|----------------------------|-------------------------------|----------------------------|----------------------------|----------------------------|
| panel | 46 inch LCD | 55 inch LCD | 65 inch LCD | 75 inch LCD | 85 inch LCD |
| resolution | 1920 × 1080 pixel | 1920 × 1080 pixel | 1920 × 1080 pixel | 1920 × 1080 pixel | 3840 × 2160 pixel |
| visible size of monitor W×H | 1018 × 573 mm | 1210 × 681 mm | 1433 × 808 mm | 1652 × 930 mm | 1876 × 1057 mm |
| brightness | 2500 nit | 2500 3500 5500 7000 nit | 4000 nit | 2500 nit | 2500 nit |
| temperature range | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C | -33 bis +40 °C |
| temperature control | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system | cooling and heating system |
| glass with UV+IR protection | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - anti-glare | VSG 9,14 mm - Optiwhite |
| dimensions W×H _{display} /H _{total} ×W | 1198 × 808 × 195 mm | 1390 × 916 × 195 mm | 1613 × 1043 × 195 mm | 1852 × 1175 × 195 mm | 2076 × 1302 × 275 mm |

Digital showcase for outdoor applications

Save the time and effort you put into printing and changing posters – present your content in a modern and attractive way with the new ST-DIGITAL showcase.

With our new product, you use a classic information platform for customers, members, or visitors in an innovative, digital dimension.

Switching to a digital system is especially useful if information or advertisements need to be updated frequently.



QUALITY FACTS



Welding certified!



Tightness certified!



RoHS Conformity



Impact resist. certified!



CE Conformity

| MODEL | 55 L 341 | 55 P 341 |
|---|----------------------------|----------------------------|
| panel | 55 inch LCD | 55 inch LCD |
| resolution | 1920 × 1080 pixel | 1080 × 1920 pixel |
| visible size of monitor W×H | 1210 × 681 mm | 681 × 1210 mm |
| brightness | 700 nit | 700 nit |
| temperature range | -10 bis +30 °C | -10 bis +30 °C |
| temperature control | cooling and heating system | cooling and heating system |
| glass with UV+IR protection | VSG 9,14 mm | VSG 9,14 mm |
| dimensions W×H _{display} /H _{total} ×D | 1390 × 915/1900 × 125 mm | 861 × 1445/2100 × 125 mm |

APPLICATION EXAMPLES



Start into a digital future

With the digitalization of media portfolios via HD screens, entirely new opportunities are created for businesses to present their entire product range with one medium directly at the point-of-sale.

Premium quality monitors are integrated into an elegant stele. The glass front is available with a ceramic print in virtually any colour. The glass front's gloss gives the stele a particular shine and a premium look. An invisible locking mechanism and concealed hinges emphasize attention to detail and a high level of quality.

QUALITY FACTS



Welding certified!



Impact resist. certified!




RoHS Conformity



CE Conformity

MODEL 55 P 211

| | |
|-----------------------------|----------------------|
| panel | 55 inch LCD |
| resolution | 1080 × 1920 pixel |
| visible size of monitor W×H | 681 × 1210 mm |
| brightness | 700 nit |
| glass | ESG 6 mm - Optiwhite |
| dimensions W×H | 861 × 1991 mm |

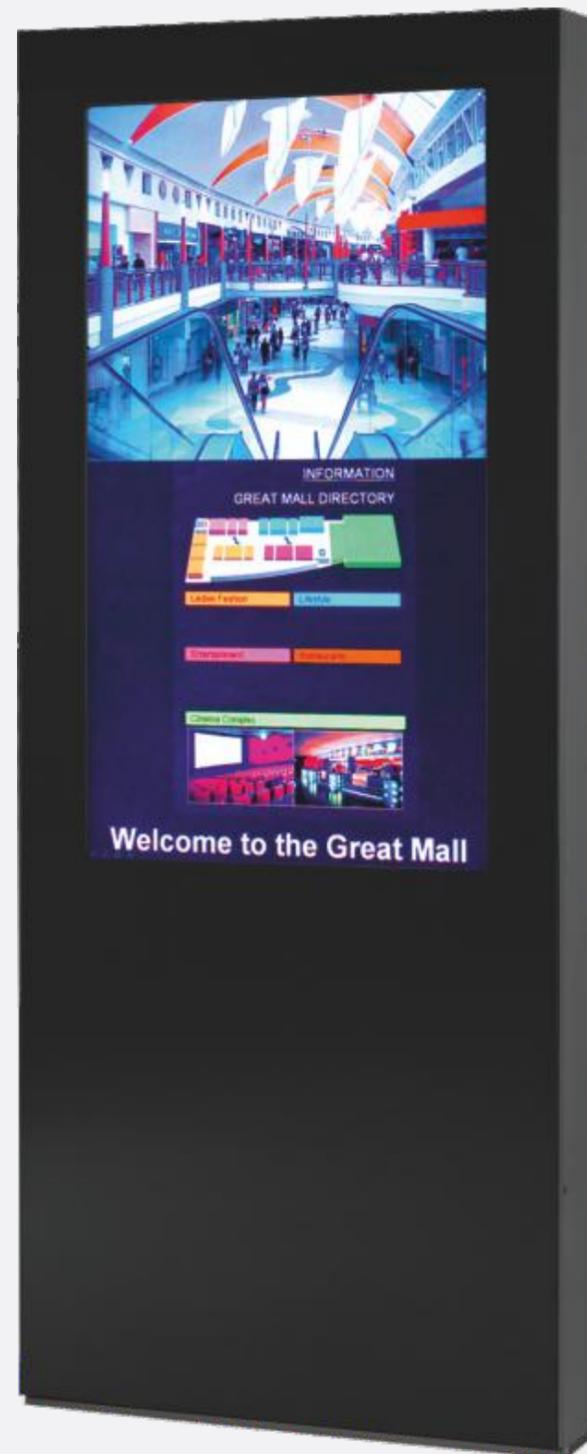

Starting dialogs

Digital advertisements may as well be just entertaining and lead the viewer onto a diverse journey through our world.

The technological possibilities become more and more efficient. Guidance systems navigate us through shopping malls, the newest products are displayed and touch screen systems enable us to access information.

MODEL 55 L 211

| | |
|-----------------------------|----------------------|
| panel | 55 inch LCD |
| resolution | 1920 × 1080 pixel |
| visible size of monitor W×H | 1210 × 681 mm |
| brightness | 700 nit |
| glass | ESG 6 mm - Optiwhite |
| dimensions W×H | 1390 × 1990 mm |



REFERENCE-PROJECT



EV 191 | LAUSANNE

Doublesided storefront-stele

Keep your customers informed with e.Vitrum solutions for storefront applications, directly in front or inside your sales space at the POS.

Optionally integrated, hidden surface acoustic speakers provide audio support, enhancing the customer experience with a well-rounded multimedia approach.

Take advantage of innovative capabilities to point out products, sales campaigns and promotions to your customers using audio-visual stimuli.



QUALITY FACTS

| | |
|---|--|
| DIN EN 1090 Welding certified! | 2x IK 10 Impact resist. certified! |
| RoHS 2011/65/EU RoHS Conformity | CE CE Conformity |

| MODEL | 55 P 412 |
|-----------------------------|-------------------|
| panel | 55 inch LCD |
| resolution | 1080 × 1920 pixel |
| visible size of monitor W×H | 681 × 1210 mm |
| brightness | 1500 / 700 nit |
| temperature range | 0 bis +40 °C |
| dimensions W×H | 750 × 2100 mm |

Freestanding storefront-display for shop window placement

Enough with pale images and poorly readable content. Enrich your shop window design with appealing animations on our High-Bright-Displays. The movement of strikingly animated campaigns and special promotions draws the shopper's attention to your shop window exhibit.

The brilliant and extremely bright displays guarantee the perfect presentation of your advertisement message, in bright environments and even in direct sunlight.



| MODEL | 55 L 451 | 65 L 451 | 55 P 421 | 65 P 421 |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| panel | 55 inch LCD | 65 inch LCD | 55 inch LCD | 65 inch LCD |
| resolution | 1920 × 1080 pixel | 1920 × 1080 pixel | 1080 × 1920 pixel | 1080 × 1920 pixel |
| visible size of monitor W×H | 1210 × 681 mm | 1433 × 808 mm | 681 × 1210 mm | 808 × 1433 mm |
| brightness | 3500 nit | 4000 nit | 3500 nit | 4000 nit |
| power consumption | 200 W (typ.) 290 W (max.) | 510 W (typ.) 740 W (max.) | 200 W (typ.) 290 W (max.) | 510 W (typ.) 740 W (max.) |
| dimensions W×H | 1240 × 710 × 90 mm | 844 × 1457 × 102 mm | 710 × 1240 × 90 mm | 1457 × 844 × 102 mm |

CONTROL YOUR SCREEN

Our sophisticated, user-friendly content management software ST-CM7 is designed for the operation of our outdoor and indoor product line e.VITRUM. The software enables the user to control and survey his digital content centrally.

You are in control of all networked monitors and can coordinate the presentation of your individually compiled data or advertising content.



KEY FACTS

Freedom of layout

ST-CM7 helps you design your layout easily and without limitations. You are not bound to predetermined layouts or templates. Nevertheless, you have a great variety of predefined layouts for free use at your disposal.

Individual layouts that have already been designed can be saved and re-used or edited if necessary

The display area is divisible in many segments. Different types of content can be presented separately on one screen at the same time.

You can decide whether you want to present single layout segments of a website, interactive elements or play videos or music.

There are no limits to creativity and ideas!

Intuitive operation

The great advantage of ST-CM7 lies in the easy and intuitive to operate user interface. If you are familiar with other windows software you will very quickly learn to use ST-CM7 efficiently.

A quick training guarantees immediate results!

Variety of formats

All common media formats can be used in your playlist without conversion. Websites, Flash-files and PowerPoint presentations (no licence required) can be presented as well as all common picture and video formats. We are pleased to send you a list of all supported file formats on request.

Immediately playable content, without time-consuming conversion of formats.

Easy maintenance and installation

The installation of ST-CM7 software on client computers usually does not take longer than 30 minutes. An easy to operate installation routine supports you in integrating the software into your network where upcoming updates and software upgrades can be run safely and without complications.


Safe system integration and easy software updates.

Log function

All layout and status information of every point-of-visualisation is being logged and saved to use the data, for instance, as a basis for accounting or service.

Review and documentation are possible at any time.

POINT OF VISUALISATION

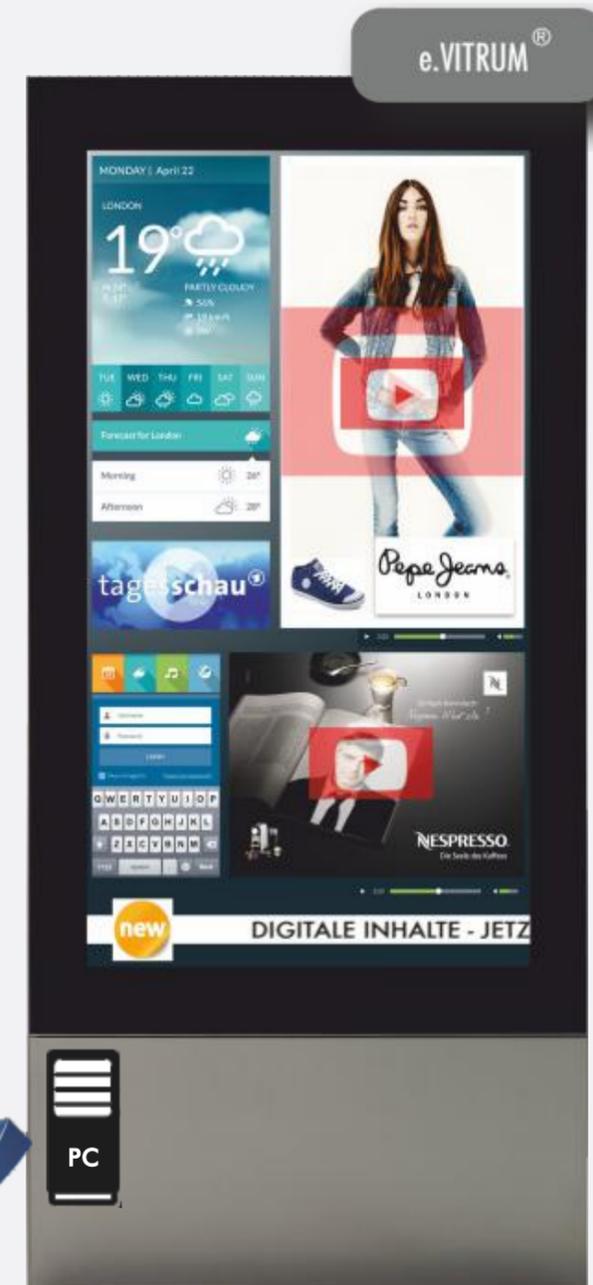

SCREEN-MANAGER



Hardware and system architecture

A **content management software** runs on a notebook or PC, centrally managing and preparing the displayed content. The software is versatile and configurable. The structure may be extended, arranged as needed and organized in folders and subgroups.

A **server** is responsible for the data storage. It sends the current content at configurable intervals to a media player PC.

The **media player PC** is integrated into the monitor stele or monitor case respectively and presents the content on the displays.



PLAYER-PC

| dimensions LxBxH | Mediaplayer BASIC | i5 |
|--------------------|--|---|
| PSU - output power | 183 × 194 × 49 mm | 115 × 111 × 51 mm |
| CPU | QuadCore / 4 × 1,6 GHz | DualCore i5 / 2,2 bis 3,4 GHz |
| GPU | Intel Gen. 8 HD Graphics | Intel Iris Plus Graphics 640 |
| network connection | Gigabit LAN | Gigabit LAN 802.11 ac WLAN v4.2 Bluetooth |
| SSD | 128GB | 240GB M.2 |
| memory | 4GB DDR3L 1600 | 8GB DDR4-2133 SO-DIMM |
| interfaces | 4 × USB (2×2.0 + 2×3.0) 1 × DVI-D 1 × DP 1 × Seriell | 4 × USB 3.0 1 × HDMI 2.0 1 × Thunderbolt 3 unterstützt USB 3.1 Gen.2 und DisplayPort 1.2 |
| MEDIA-PLAYER | Dedicated media-players in many different configurations can be used alternatively | |

GALLERY





EV 261 | TELGTE



EV 262 | ZURICH



EV 263 | BIELEFELD




EV 271 | BASEL



EV 281 | HÖVELHOF



EV 282 | ZÜRICH

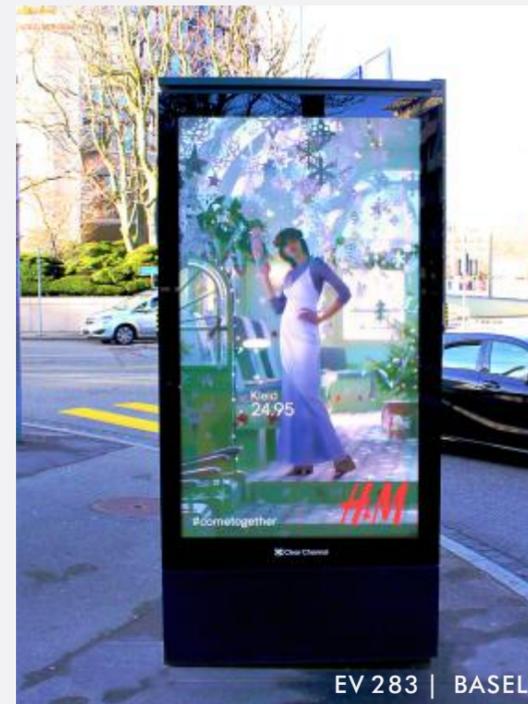

EV 283 | BASEL





EV 291 | ROSTOCK



EV 292 | EV CHARGING STATION



EV 293 | LAUSANNE

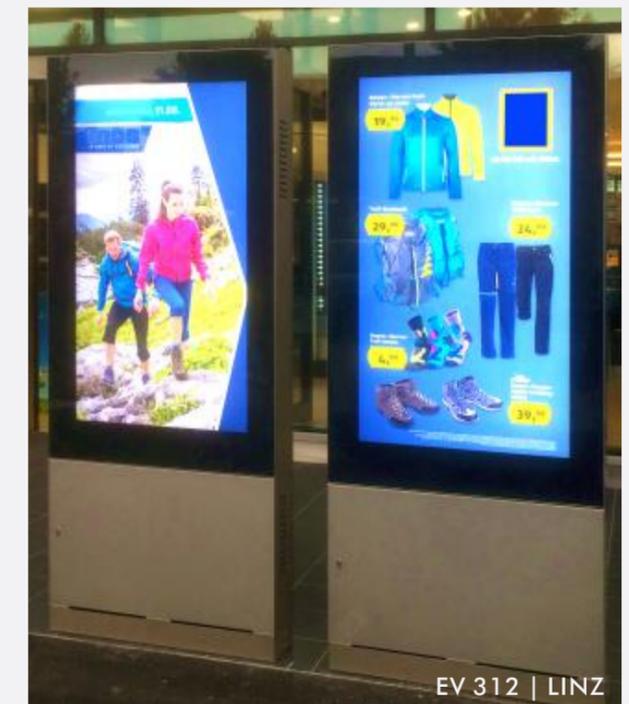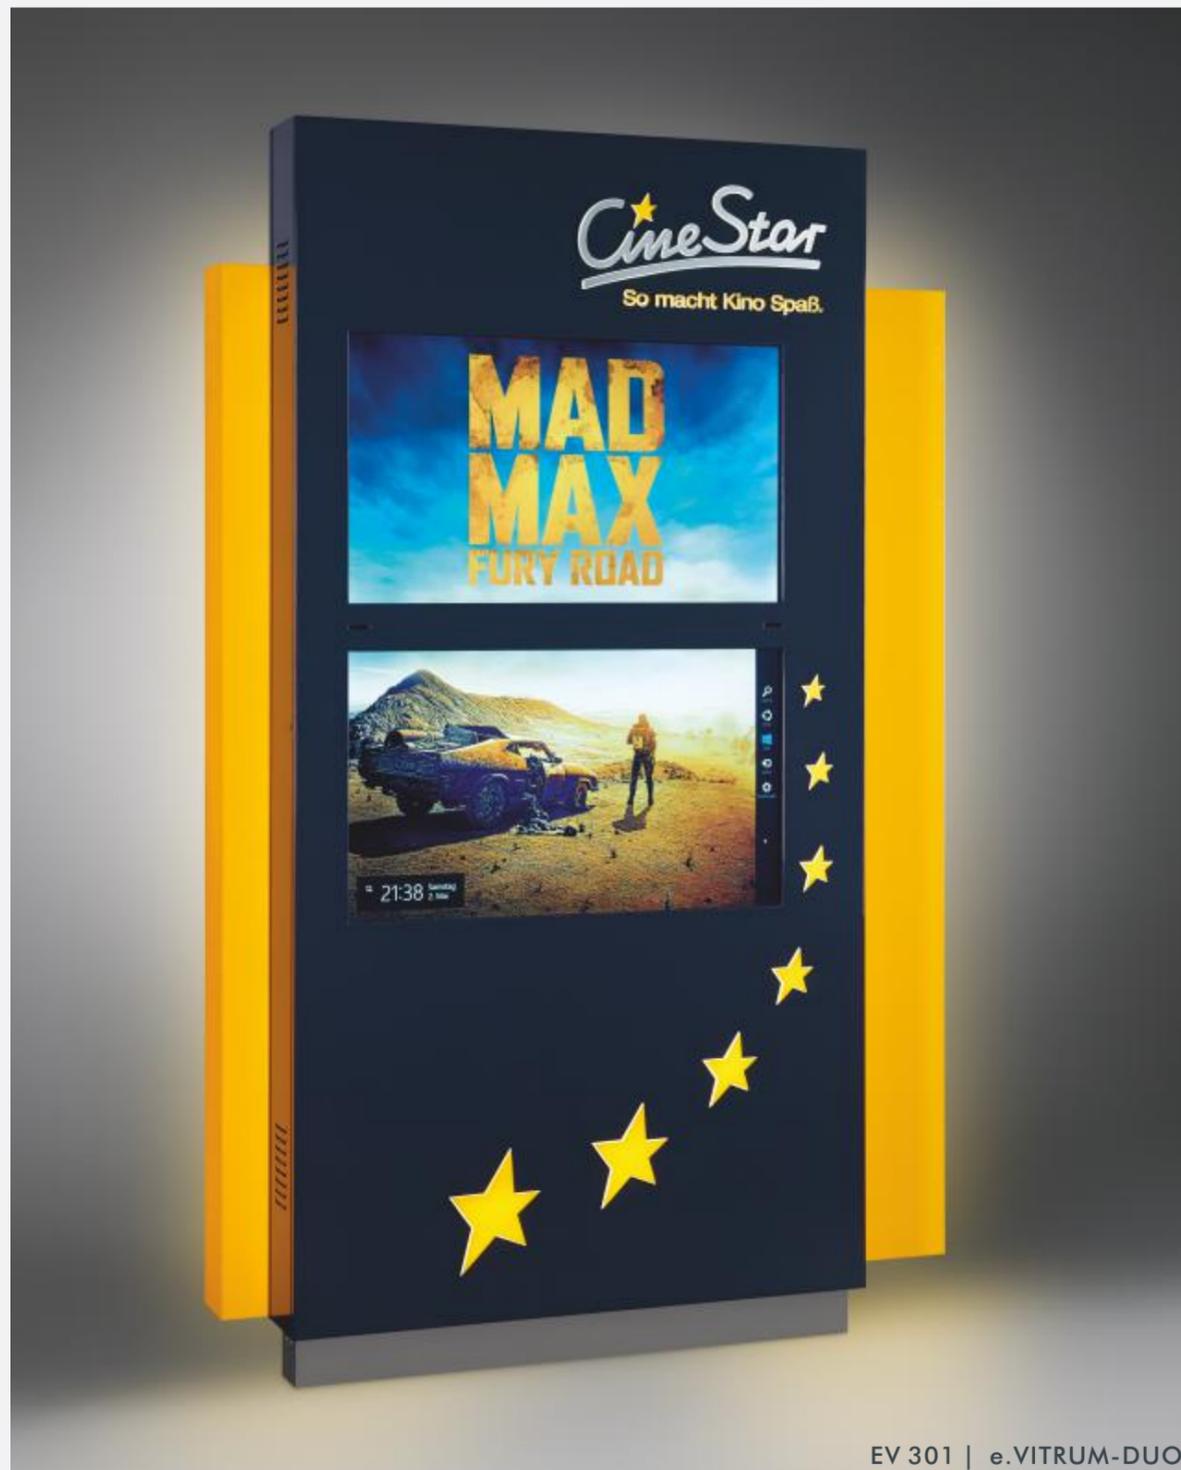



EV 321 | VIENNA



EV 331 | GERMAN THEATER MUNICH



EV 332 | THEATER BIELEFELD



EV 333 | RÜSSELSHEIM



EV 341 | e.VITRUM-QUADRO

e.VITRUM - QUADRO

The "pinnacle" of our digital signage projects is located in the middle of the skiing area of the Austrian region Obertauern, at a height of about 2,000

metres above sea level. The Krings Alm shows events and live pictures from the restaurant and the après ski bar on four high brightness monitors.

A special temperature management guarantees a safe operation at a temperature of -33°C during the winter and in bright sunlight during the summer.




EV 351 | FISS-LADIS



EV 352 | WEIDEN



EV 353 | GRAZ

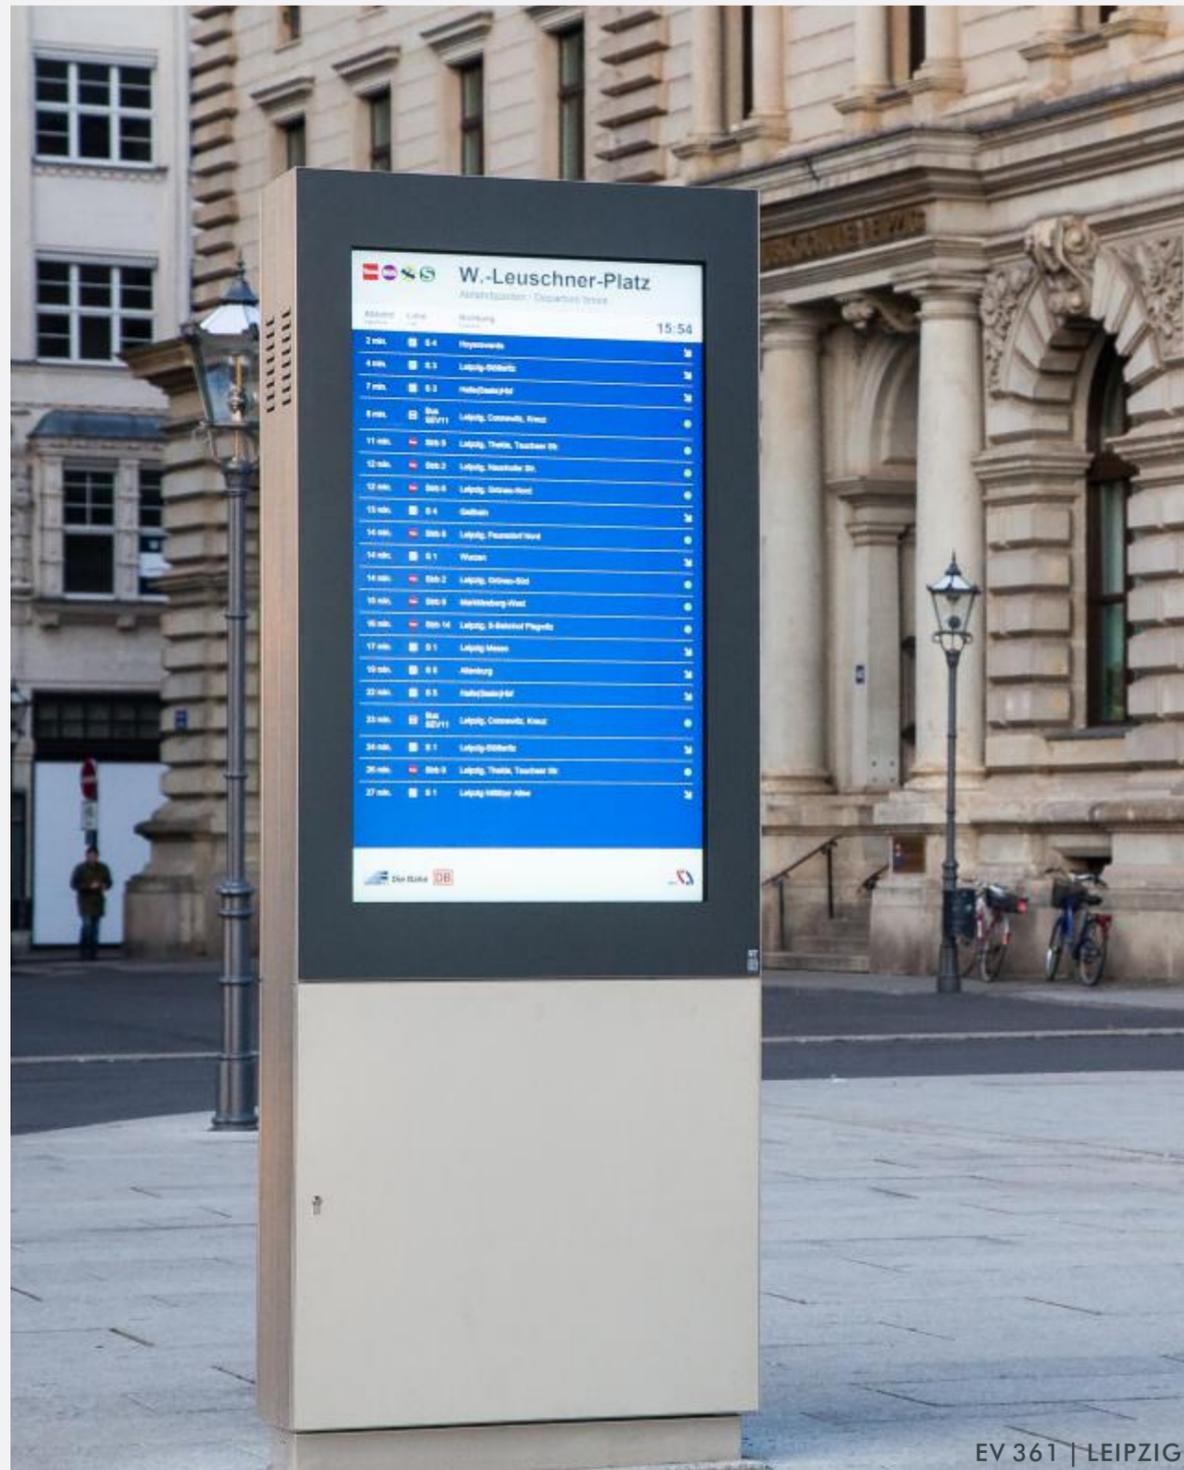

EV 361 | LEIPZIG



EV 371 | BERLIN-SÜDKREUZ



EV 372 | 3 x 47" - ATTNANG-PUCHHEIM



EV 381 | MVG MUNICH



EV 391 | CENTRAL STATION MÜNSTER



EV 392 | CENTRAL STATION AUGSBURG



EV 401 | 46" TOUCHSCREEN-MONITORS / SSB STUTTART



EV 402 | 47" LANDSCAPE OPEN

With an optional mechanism to adjust the alignment, the monitor can be mounted at a tilt towards the viewer of up to 15°.

The housings are top-hinged with gas springs. The integrated monitor can be pivoted as well to allow better access to the electronic components



EV 403



EV 411 | VIENNA / CENTRAL STATION



EV 404 | VIENNA / SÜDTIROLER PLATZ



EV 412 | VIENNA / CENTRAL STATION



EV 421 | SALZBURG CENTRAL STATION



EV 422 | GKB-GRAZ



EV 423 | SSB STUTTGART



ST 81

ST 81
Coiling sheet machine
ST 82
Profile stock II in the logistics centre
ST 83
Our vehicle fleet
ST 84
Despatch area for monitor showcases
ST 85
Profile machining centre - SBZ II



ST 82



ST 83



ST 84



ST 85



ST 86


OUR PROFILE

Since 1969 we plan, develop and manufacture showcases and clocks for a wide range of applications for the indoor and outdoor area. Our innovative information systems are developed by a network of partners, architects and planners to be realised by our team of skilled metal workers, carpenters, glaziers and electronic technicians. It has always been our demand to provide our products with the highest quality, safety and operability and to give them a unique, individual design.

ST 86
Company headquarters in Bielefeld
in front:
office and production
in the background:
Logistics centre and e.Vitrum production
ST 87
Logistics centre



ST 87

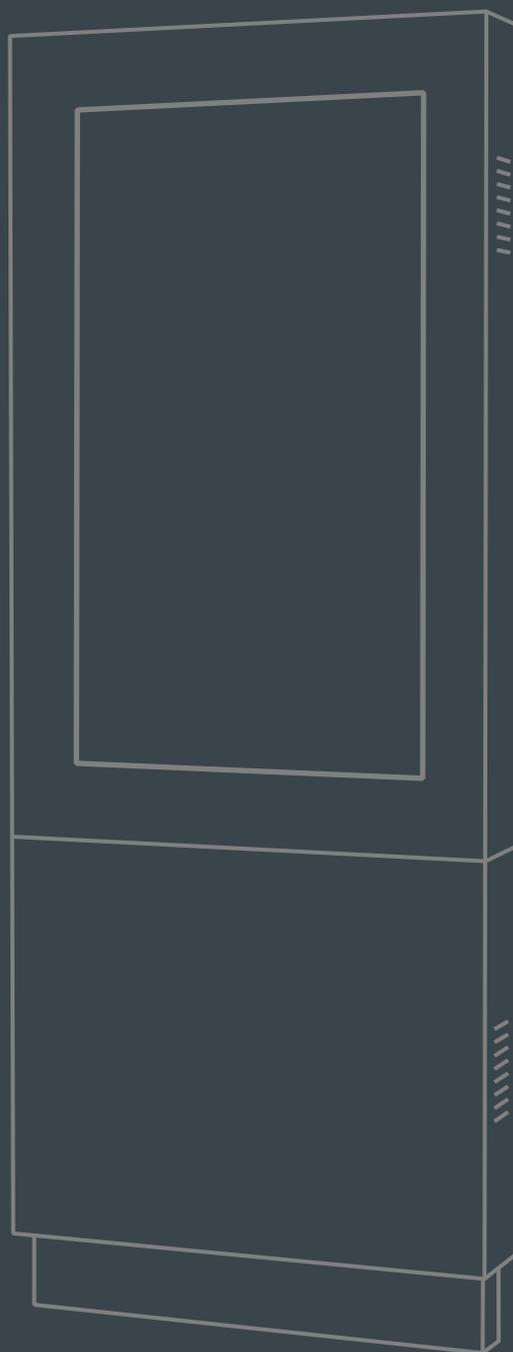

e.VITRUM® | EDITION 5.0



www.st-digital.de

© 2018 - ST-VITRINEN

ST-DIGITAL is a
business division of
ST-Vitrinen Trautmann
GmbH & Co. KG
Grafenheider Str. 100
33729 Bielefeld
Tel: +49 521 97704 - 0
Fax: +49 521 97704-44
Mail: info@st-vitrinen.de